

SPRINT™ HOLDFAST


ELECTRO-MAGNETIC LOCKS SLIDING SPECIFICATION

● SPECIFICATIONS AND TECHNICAL DETAILS:


- DIMENSIONS : MAGNET 228Lx38Hx27D
ARMATURE PLATE 185Lx38Wx12.5Tmm
- MORTISE MOUNTED
- CURRENT DRAW : 500mA/12V, 250mA/24VDC
- DUAL VOLTAGE : 12V/24VDC
- OPTIONS : TIMER, LOCK STATUS SENSOR, LED
- BUILT-IN VOLTAGE SPIKE SUPPRESSOR
- HOLDING FORCE : ABOUT 600LBS.
- CE APPROVED
- UL LISTED.




■ SUGGESTED INSTALLATION POSITIO

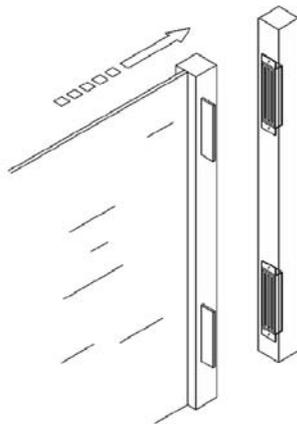

■ TYPICAL INSTALLATION

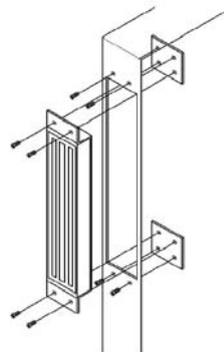


INSTALLATION OF MORTISE MAGLOCK
BODY ON STEEL/ALUMINUM FRAME



INSTALLATION OF MORTISE BRACKET

■ APPLICATIONS

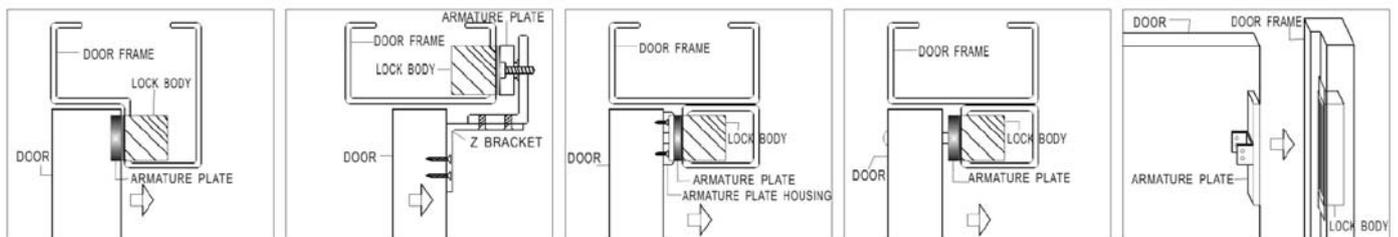

SPRINT RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.



LISTED
AUXILIARY LOCK 3/4 HR. RATING
30JE